



ELF-D Filter housing


Accepts 25.4cm(10") / 50.8cm(20")

Code 6 and Double Open End Filter Cartridges

- Operating pressure up to 28 bar permits use in a wide range of applications
- In-line inlet and outlet connections for easy installation
- Stainless steel for durability and corrosion resistance

Specifications

Design Pressure	28 bar
Materials	Head SS304 , SS316L
	Bowl SS304 , SS316L
Connections	Inlet/Outlet 1" ECO25-PN25
	Vent 1/4" NPT , BSP
	Drain 3/4" NPT , BSP
Seal Materials	Buna, EPDM, Si.Rubber, FEP/Viton

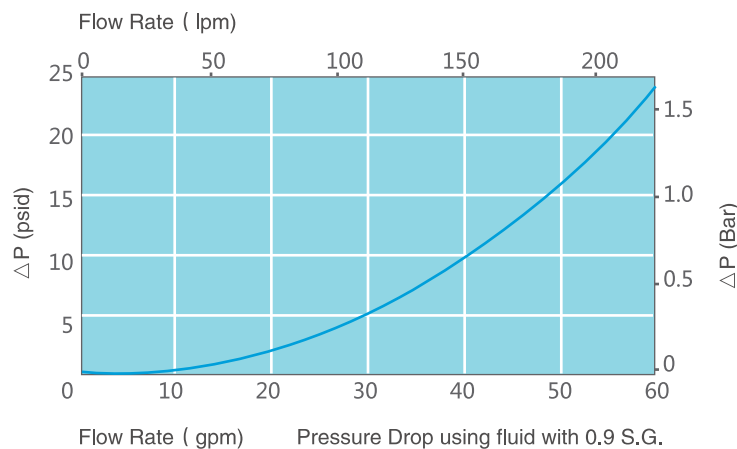

Application

- High pressure filtration
- Various industrial applications




ELF-D Filter housing

Dimensions



Model	Cartridge Length	L1 (mm)	L2 (mm)	Weight Empty (kg)
EDLCE10***	10	140	434	5.9
EDLCE20***	20	140	688	7.3

Cartridge Connection

6 – 222 / Fin End

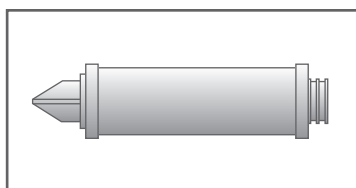

7 – Double Open End

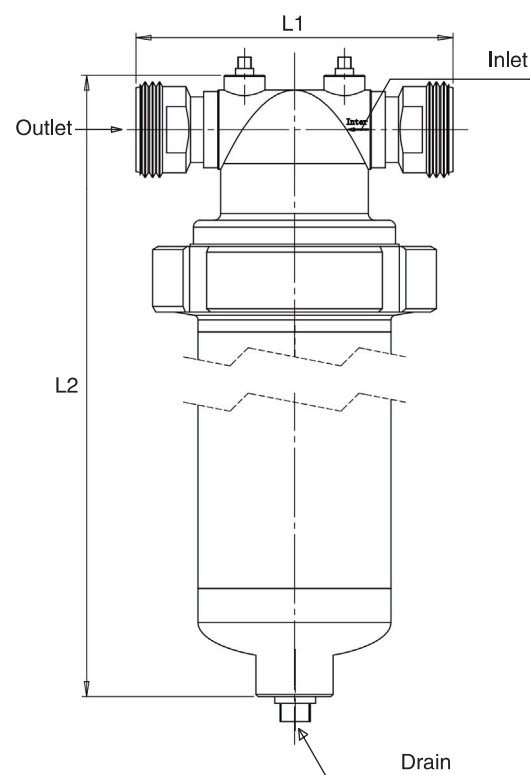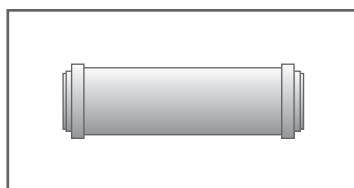

Code

EDLC	E	20	7	D	28	25	B
Model	Material	EL.Length	EL.Connection	Conn.Type	Press.Class	Inlet/Outlet Size	Seal Materials
D-D series	E – SS304 S – SS316L	10 – 10" 20 – 20"	6 – 222 / Fin End 7 – DOE	N – NPT B – BSP D – DIN	28 – 28bar	25 – 1"	B – Buna E – EPDM F – FEP / Viton S – Si . Rubber

e.g. EDLCE207D2825B